



POLAR FLASH SED5 WITH CEILING ELEMENT STAINLESS STEEL

FUNCTION DESCRIPTION

Programme 1: Fog Shower with aroma

After the start of the programme by a button, the light in the shower changes from white to a blue-green colour change. A cold, refreshing Fog with very fine droplets starts to spray and a minty, cooling aroma fills the air. In a distance you hear the sound of waves and sea. After the end of the programme, the illumination changes back to white, the Fog and the sound are switching off.

Programme 2: Side Nozzles

After the start of the programme by a button, the light in the shower changes from white to green. Cold Side Nozzles massage the guest in the shower. You hear the burbling sound of an alpine creek. After the end of the programme, the illumination changes back to white, the Side Nozzles and the sound are switching off.

Programme 3: Cold Rain

After the start of the programme by a button, the light in the shower changes from white to blue. A cold Rain refreshes the guest in the shower. You hear birds tweeting. After the end of the programme, the illumination changes back to white, the Drizzle and the sound are switching off.

Programme 4: Polar Rain

The programme starts with the cold Side Nozzles and green light. You hear the burbling sound of an alpine creek. In the following the cold, refreshing Fog with very fine droplets works together with the Side Nozzles. A minty, cooling aroma fills the air. The illumination changes to a blue-green colour change. In the final programme step the cold Rain is working together with the cold Side Nozzles. After the end of the programme the illumination changes back to white, the Rain, the Side Nozzles and the sound are switching off.

SCOPE OF DELIVERY OF A COMPLETE PACKAGE

CONTROL PANEL



Control panel incl. listed parts, pre-tubed, pre-wired and pre-mounted on PP board grey - Part no. 14122:

- 1 x Supply cold with pre-filter and ball valve MS 3/4" female thread
- 2 x Outlet with solenoid valve 1/2" and screwing 1/2"
- 1 x Outlet with solenoid valve 3/4" and screwing 3/4"
- Emptying for the tube to the aromatised nozzle
- Fragrance pump with fragrance reservoir and empty switch
- Dosing valve for the injection of aroma into the water tube
- Non-return according to DIN EN 1717
- Microprocessor controller EDS1 in housing

TECHNICAL DATA

Electrical supply	230 V-AC, 50 Hz
Power supply	100 W
Water supply	1 x 3/4" female thread
Dimensions (W/H/D)	750 x 750 x 200 mm
Weight	app. 12 kg

PUSH BUTTON


Details see page 72



- 1 x Push-button plate 4-fold stainless steel polished - Part no. 25941
- 1 x Bonnet 4-fold - Part no. 21032-1

CEILING ELEMENT INCL. ILLUMINATION

Details see page 76

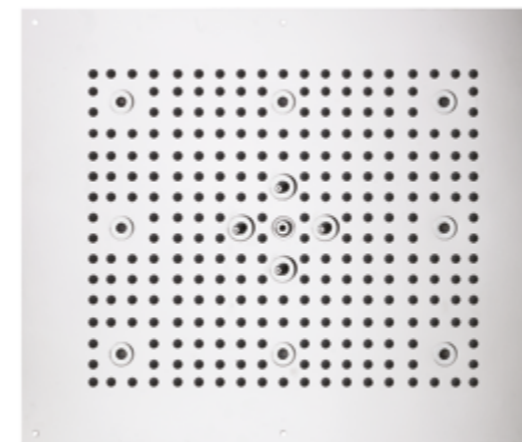

- 1 x Ceiling element stainless steel chrome optic (Rain Shower, Mist - 8 LED RGB Spots) - Part no. 24980

NOZZLES

Details see page 74

- 6 x Side Nozzle - Part no. 19769-2



SOUND

Details see page 80



- 1 x Sound module MP3 - Part no. 18824-1
- 1 x Speaker - Part no. 14366-4

TO BE PROVIDED BY THE BUILDER

- Plants room for the installation of the control panel
- Power supply
- Water connection cold 3/4"
- Needed pressure: 3 bar dynamic
- Water quantity: app. 70 l/min
- Drain in the plants room
- Tubing to the nozzles

ACCESSORIES / OPTIONS

- Fragrance