



TROPICAL THUNDER RA2 WITH CEILING ELEMENT STAINLESS STEEL

FUNCTION DESCRIPTION

Programme 1: Tropical Rain

After the start of the programme by a button the light in the shower changes from white to a red-green colour change and a soft, warm Waterfall Part Blade patters onto the guest in the shower. You hear birds tweeting. In the following, a warm Tropical Rain starts. A fruity, lively aroma fills the air. Now a cold Fog cools the temperature down. Then the cold Fog stops and the programme finishes with a warm Fog and the aromatised Tropical Rain. After the end of the programme the illumination changes from the red-green colour change back to white, the warm Fog and the aromatised Tropical Rain are switching off.

Programm 2: Caribbean Rain

The programme starts with a warm Waterfall Part Blade and red light. In a distance you hear the sound of waves and sea. After an adjustable time the light changes to green and a cold, refreshing Fog with very fine droplets refreshes the user. A minty, cooling aroma fills the air. In the following the warm Waterfall Part Blade stops and the cold Fog continues. Now a warm Waterfall Full Blade with blue light starts and then goes over into a warm Waterfall Part Blade. You hear a thunderstorm coming and you see flashlights. The scenario lapses with a warm Waterfall Part Blade and red light. After the end of the programme the illumination changes back to white.

SCOPE OF DELIVERY OF A COMPLETE PACKAGE

CONTROL PANEL



Control panel incl. listed parts, pre-tubed, pre-wired and pre-mounted on PP board grey - Part no. 19290:

- 2 x Supply with pre-filter and ball valve MS 3/4" female thread
- Thermomixer JRG 3/4" with non-return valves
- 6 x Outlet with solenoid valve 1/2" and screwing 1/2"
- Emptying for the tube to the aromatised rain nozzle
- 2 x Fragrance pump with fragrance reservoir and empty switch
- 2 x Dosing valve for the injection of aroma into the water tube
- 2 x Microprocessor controller EDS1 in housing

TECHNICAL DATA

Electrical supply	230 V-AC, 50 Hz
Power supply	150 W
Water supply	2 x 3/4" female thread
Dimensions (W/H/D)	1000 x 750 x 200 mm
Weight	app. 20 kg

PUSH BUTTON


Details see page 72



- 1 x Push-button plate 2-fold stainless steel polished - Part no. 25943
- 1 x Bonnet 2-fold - Part no. 21034-1

CEILING ELEMENT INCL. ILLUMINATION

Details see page 76

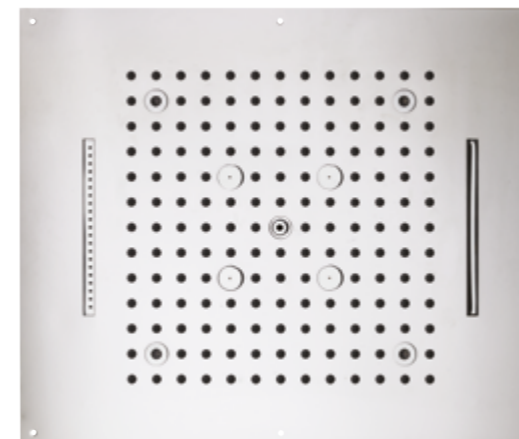

1 x Ceiling element stainless steel chrome optic (Rain Shower, Waterfall Full Blade, Waterfall Part Blade, Mist - 4 LED RGB Spots) - Part no. 24651

SOUND

Details see page 80



- 1 x Sound module MP3 - Part no. 18824-1
- 1 x Speaker - Part no. 14366-4

TO BE PROVIDED BY THE BUILDER

- Plants room for the installation of the control panel
- Power supply
- Water connection cold 3/4"
- Water connection warm 3/4"
- Needed pressure: 3 bar dynamic
- Water quantity: app. 70 l/min
- Drain in the plants room
- Tubing to the nozzles
- 2 x Non-return according to DIN EN 1717

ACCESSORIES / OPTIONS

- Fragrance