



SHOWER TUNNEL WITH CEILING ELEMENTS STAINLESS STEEL WITH 3 ZONES

FUNCTION DESCRIPTION

In standby mode all zones are illuminated white. Once the tunnel has been activated the white light switches-off and only the currently activated zone is illuminated. The overlap time between the single zones is three seconds. The shower walk starts with a warm, aromatised Tropical Rain and red lights. You hear birds tweeting. In the following a warm Waterfall Full Blade is replacing the Tropical Rain. At the second station, a cold Rain is cooling the guest in the tunnel down, the illumination changes to blue. Afterwards a cold Fog replaces the cold Rain – you can hear the roll of thunder and flashlights fill the room. In the third zone a warm Tropical Rain patters together with a warm Waterfall Full Blade on the guest in the shower. The light shines red and birds tweeting. Afterwards the tunnel is ready for a restart.

SCOPE OF DELIVERY OF A COMPLETE PACKAGE

CONTROL PANEL



Control panel incl. listed parts, pre-tubed, pre-wired and pre-mounted on PP board grey - Part no. 19374-1:

- 2 x Supply with pre-filter and ball valve MS 1" female thread
- Thermomixer JRG 3/4" with non-return valves
- 3 x Outlet with solenoid valve warm 3/4" and screwing 3/4"
- 2 x Outlet with solenoid valve cold 3/4" and screwing 3/4"
- 1 x Fragrance pump with fragrance reservoir and empty switch
- 1 x Dosing valve for the injection of aroma into the water tube
- 1 x Microprocessor controller EDS1 in housing

TECHNICAL DATA

Electrical supply	230 V-AC, 50 Hz
Power supply	150 W
Water supply	2 x 1" female thread
Dimensions (W/H/D)	1000 x 750 x 200 mm
Weight	app. 20 kg


PUSH BUTTON

Details see page 72

- 1 x Push-button plate 1-fold stainless steel polished - Part no. 25942
- 1 x Bonnet 1-fold - Part no. 21030-1

CEILING ELEMENT INCL. ILLUMINATION

Details see page 76

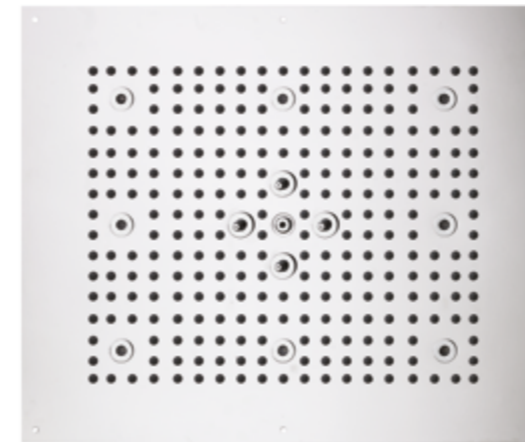

2 x Ceiling element stainless steel chrome optic (Rain Shower, Waterfall Full Blade - 4 LED RGB Spots) - Part no. 24652

1 x Ceiling element stainless steel chrome optic (Rain Shower, Mist - 8 LED RGB Spots) - Part no. 24980

SOUND

Details see page 80



- 1 x Sound module MP3 - Part no. 18824-1
- 1 x Speaker - Part no. 14366-4
- 2 x Relais board WDT-NT-34 RSL-V2 - Part no. 24926

TO BE PROVIDED BY THE BUILDER

- Plants room for the installation of the control panel
- Power supply
- Water connection cold 1"
- Water connection warm 1"
- Needed pressure: 3 bar dynamic
- Water quantity: app. 60 l/min
- Drain in the plants room
- Tubing to the nozzles
- 2 x Non-return according to DIN EN 1717

ACCESSORIES / OPTIONS

- Fragrance